




REAR

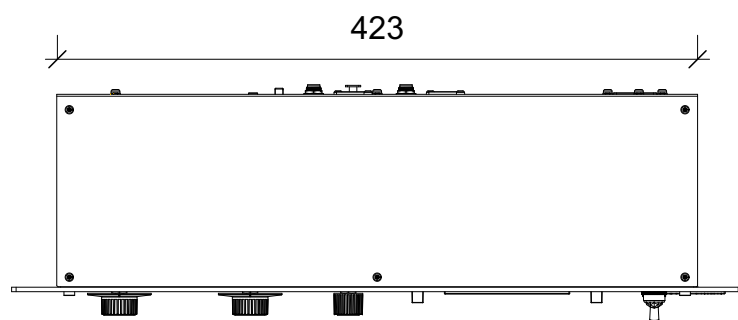

TOP

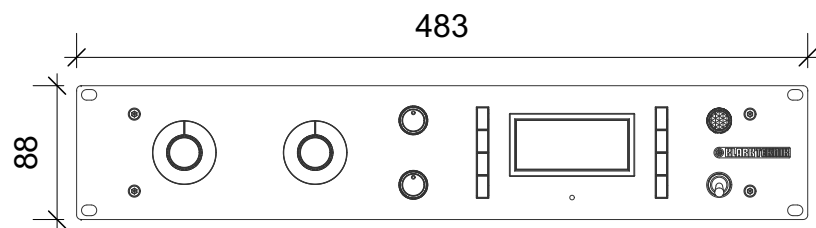

FRONT



SIDE

Audio Input
Type : XLR, 1/4" TRS transformer balanced
Impedance : >600 Ω balanced and unbalanced
Max. input level : +30 dBu
Pad switch : -20 dB typical

Audio Output
Type : XLR, 1/4" TRS transformer balanced
Impedance : 105 Ω balanced and unbalanced
Max. output level : +25 dBu

System Specifications
Frequency response : 20 Hz to 20 kHz ± 1 dB
S/N ratio : 8 0 dB @ +4 dBu
Distortion (THD+N) : 0.15% typical

Compressor
Attack time : 25 to 760 μ s adjustable
Release time : 80 to 670 ms adjustable
Ratio settings : 20:1, 12:1, 8:1, 4:1
Meter settings : Gain reduction +8 / 6 / 4 dBu

Power Supply
Mains voltage : 100 - 240 V, 50/60 Hz
Power consumption : 10 W
Fuse : T1AH 250V
Mains connection : Standard IEC receptacle

Physical
□ Dimensions (H x W x D) : 88 x 483 x 159 mm<
□ Weight : 2.8 kg



種別 アナログ・コンプレッサー

形式 76-KT

縮尺 1 / 5

作成 20190719

C