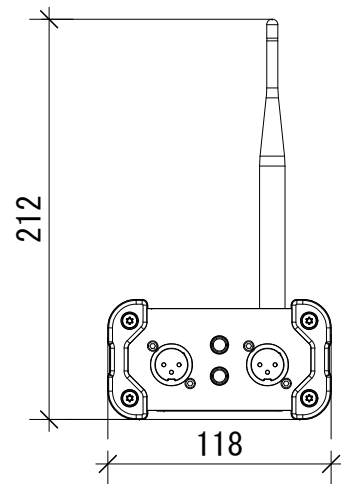
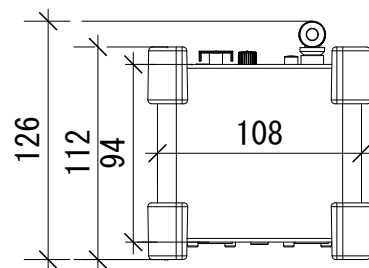


Outputs

Connectors Balanced : XLR, unbalanced 1/4"
Impedance : 240 Ω
Max. output level : +4 dBu @ 1 kHz

Bluetooth

Frequency range : 2402 - 2480 MHz
Channel number : 79
Bluetooth version : 4.2
Receiver range : Up to 30 m
Output power : Class 2, <10 dBm
Supported codec : SBC, aptX
Supported profiles : AVRCP 1.4, A2DP 1.2

System

Frequency response : 20 Hz to 20 kHz (+0/-2 dB)
THD + N (distortion) : 0.1% @ 1 kHz
Signal-to-noise ratio : >90 dB
Power adaptor : 12 V DC, 400 mA, center positive

Physical

Dimensions (H x W x D)
Without bumpers or antenna : 54 x 108 x 103 mm
With bumpers, without antenna : 63 x 118 x 112 mm
With bumpers, upright antenna : 212 x 118 x 126 mm
Weight incl. bumpers and antenna : 0.6 kg



種別 ステレオオーディオ・Bluetoothスワイヤレストレシーバ

形式 DW20BR

縮尺 1 / 4

作成 20190723

C