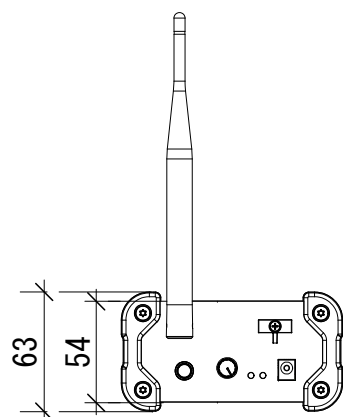
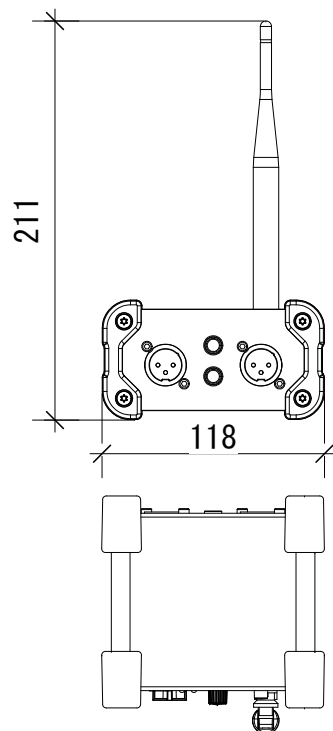


Outputs
Connectors : Balanced XLR, unbalanced ¼"
Impedance : 240 Ω balanced, 120 Ω unbalanced
Max. input level : 15 dBu

Wireless
Channels : 24
Transmission : frequency 2.406 - 2.475 GHz
Wireless range : Up to 30 m (100 ft)
Sensitivity : -81 dBm @ 1% PER

System
Frequency response : 20 Hz to 20 kHz (±1 dB)
THD + N (distortion) : 0.1% @ 1 kHz
Signal-to-noise ratio : >90 dB
Power adaptor : 12 V DC, 400 mA, center positive

Physical
Dimensions (H x W x D), Without bumpers or antenna :

54 x 108 x 103 mm

With bumpers, without antenna : 63 x 118 x 112 mm

With bumpers, upright antenna : 212 x 118 x 126 mm

Weight (incl. bumpers and antenna) : 0.6 kg



種別 ステレオオーディオ・2.4Gワイヤレスレシーバ

形式 DW20R

縮尺 1 / 4

作成 20190722

C