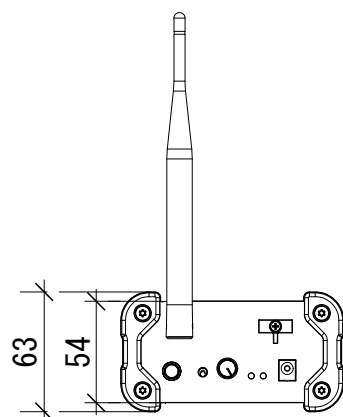
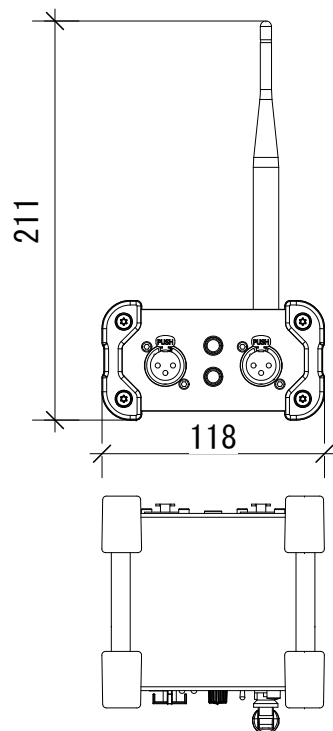


Inputs

Connectors : Balanced XLR, unbalanced ¼ "

Impedance : 10 kΩ balanced, 15 kΩ unbalanced

Max. input level : 10 dBuT

Wireless

Channels : 24

Transmission frequency : 2.406 - 2.475 GHz

Wireless range : Up to 30 m (100 ft)

Transmission power : 12 dBm

System

Frequency response : 20 Hz to 20 kHz (±1 dB)

THD + N (distortion) : 0.1% @ 1 kHz

Signal-to-noise ratio : >90 dB

Power adaptor : 12 V DC, 400 mA, center positive

Physical

Dimensions (H x W x D), Without bumpers or antenna :

54 x 108 x 103 mm

With bumpers, without antenna : 63 x 118 x 112 mm

With bumpers, upright antenna : 212 x 118 x 126 mm

Weight (incl. bumpers and antenna) : 0.6 kg



種別 ステレオオーディオ・2.4Gワイヤレストランスミッタ

形式 DW20T

縮尺 1 / 4

作成 20190722

C